




JOHN DEERE

PowerTech™ E

6068H Diesel Engine

Specifications

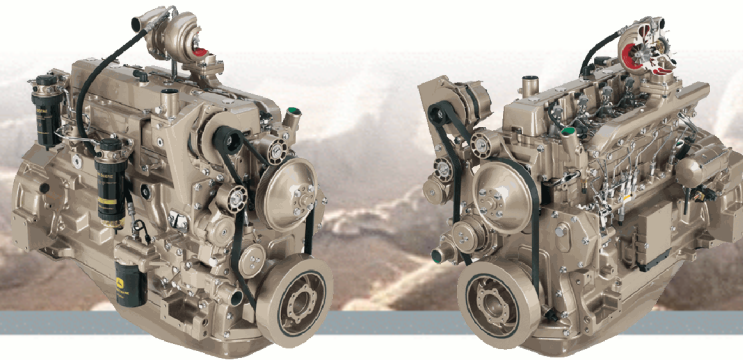

6068HF Engine shown

General Data

Model	6068HF285	Aspiration	Air-to-Air
Number of cylinders	6	Length-- mm (in)	1123 (44.2)
Displacement-- L (cu in)	6.8 (415)	Width-- mm (in)	657 (25.9)
Bore and Stroke-- mm (in)	106 x 127 (4.17 x 5.00)	Height-- mm (in)	1036 (40.8)
Compression Ratio	19.0:1	Weight, dry-- kg (lb)	608 (1340)
Engine Type	In-line, 4-Cycle		

Rated BHP is the power rating for variable speed and load applications where full power is required intermittently.



Continuous BHP is the power rating for applications operating under a constant load and speed for long periods of time.

Heavy duty - see application ratings/definitions, engine performance curves. Power output is within + or - 5% at standard SAE J 1995 and ISO 3046.

Certifications

- CARB
- EPA Tier 3
- EU Stage III A

Dimensions

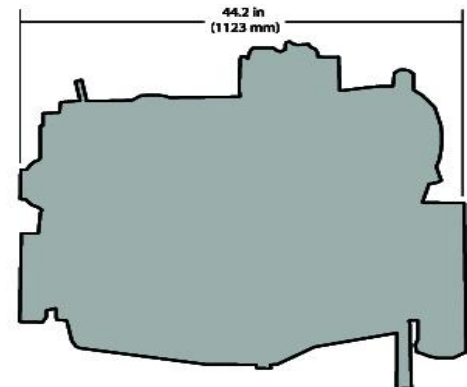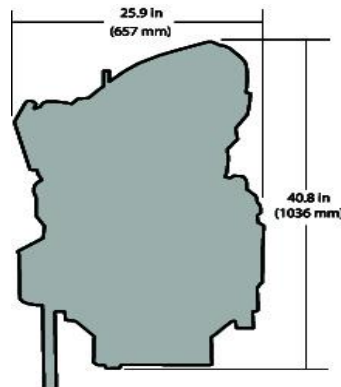

Performance data

Rated Speed

Intermittent	116 kW (156 hp) @ 2400 rpm
--------------	----------------------------

Peak power

Power bulge %	116 kW (156 hp) @ 2400 rpm
---------------	----------------------------


0% @ NA rpm

Peak torque

Torque Rise %	598 N-m (441 ft-lb) @ 1500 rpm
---------------	---------------------------------

30% @ 1500 rpm

Performance curve

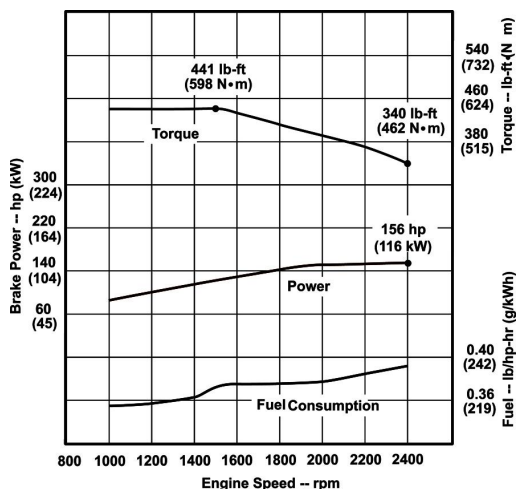

Features and Benefits

2-Valve Cylinder Head

- Cross flow head design that provides excellent breathing from a lower cost two-valve cylinder head

High-Pressure Common-Rail (HPCR) and Engine Control Unit (ECU)

- The HPCR fuel system provides variable common-rail pressure, multiple injections, and higher injection pressures, up to 1600 bar (23,000 psi). It also controls fuel injection timing and provides precise control for the start, duration, and end of the injection

Fixed Geometry Turbocharger

- Fixed geometry turbochargers are precisely matched to the power level and application

Air-to-Air Aftercooled

- This is the most efficient method of cooling intake air to help reduce engine emissions while maintaining low-speed torque, transient response time, and peak torque. It enables an engine to meet emissions regulations with better fuel economy and the lowest installed costs

Compact Size

- Mounting points are the same as Tier 2/Stage II engine models

Multiple Injection Strategy

- The new HPCR fuel system and engine control unit (ECU) allow for multiple fuel injections. The number of fuel injections, based on speed and load, help contribute to lower combustion temperatures, which reduce the formation of NOx and particulates. The multiple injection strategy also provides an added benefit of noise reduction

Engine Performance

- New power bulge feature
- Increased low speed torque
- New higher peak torque ratings
- Faster torque rise
- Lower-rated speeds available for reduced noise and improved fuel economy

John Deere Electronic Engine Controls

- Electronic engine controls monitor critical engine functions, providing warning and/or shutdown to prevent costly engine repairs and eliminate the need for add-on governing components all lowering total installed costs. Snapshot diagnostic data that can be retrieved using commonly available diagnostic service tools
- Controls utilize new common wiring interface connector for vehicles or available OEM instrumentation packages; new solid conduit and "T" connectors to reduce wiring stress and provide greater durability and improved appearance
- Factory-installed, engine mounted ECU or remote-mounted ECU comes with wiring harness and associated components. Industry-standard SAE J1939 interface communicates with other vehicle systems, eliminating redundant sensors and reducing vehicle installed cost

Additional Features

- Self-adjusting poly-vee fan drive
- Forged-steel connecting rods
- Replaceable wet-type cylinder liners
- Either-side service
- 500-hour oil change
- Gear-driven auxiliary drive



John Deere Power Systems
 3801 W. Ridgeway Ave.
 PO Box 5100
 Waterloo, IA 50704-5100
 Phone: 800.553.6446
 Fax: 319.292.5075

John Deere Power Systems
 Usine de Saran
 La Foulonnerie - B.P. 11.13
 45401 Fleury les Aubrais Cedex
 France
 Phone: 33.2.38.82.61.19
 Fax: 33.2.38.82.60.00